


IDC Connectors for PCBs

ADIP Series

IDC male header, PCB, straight, suitable also for IC sockets (RM 2,54 mm).




Part No.	A [mm]	B [mm]
ADIP 14 Z	22,44	10,7
ADIP 16 Z	24,98	10,7
ADIP 24 Z	35,14	18,3

Part No.	Description
ADIP 14 Z	IDC connector DIP 14P RM2,54/7,62
ADIP 16 Z	IDC connector DIP 16P RM2,54/7,62
ADIP 24 Z	IDC connector DIP 24P RM2,54/15,24

Part No.	Ord.No.
S ADIP 14 Z	18483
S ADIP 16 Z	18484
S ADIP 24 Z	18485

AWLP Series

IDC male header, PCB, straight, suitable also for BL2. RM 2,54 x 2,54 mm.

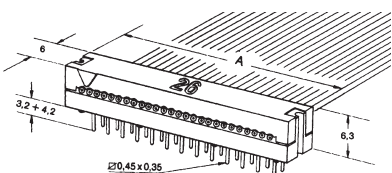

Part No.	A [mm]	Type	A [mm]
AWLP 10	17,5	AWLP 26	37,9
AWLP 14	22,6	AWLP 34	48,1
AWLP 16	25,1	AWLP 40	55,7
AWLP 20	30,2		

Part No.	Description
AWLP 10	IDC connector for PCB 10P RM2,54
AWLP 14	IDC connector for PCB 14P RM2,54
AWLP 16	IDC connector for PCB 16P RM2,54
AWLP 20	IDC connector for PCB 20P RM2,54
AWLP 26	IDC connector for PCB 26P RM2,54
AWLP 34	IDC connector for PCB 34P RM2,54
AWLP 40	IDC connector for PCB 40P RM2,54


Part No.	Ord.No.
S AWLP 10	18474
S AWLP 14	18475
S AWLP 16	18476
S AWLP 20	18477
S AWLP 26	18478
S AWLP 34	18479
S AWLP 40	18480

Suitable pliers HT-214D
see chapter K.



People | Power | Partnership

Industrial Connectors Han®

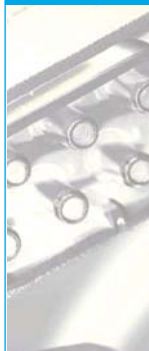


Han® industrial connectors with degree of protection IP 65 / IP 67 represent the worldwide connector standard with regard to safe installation, efficient commissioning and servicing of machines and plants.



DIN connectors



HARTING offers a wide product range of DIN 41 612 connectors for data, signal and power lines, including corresponding accessories.

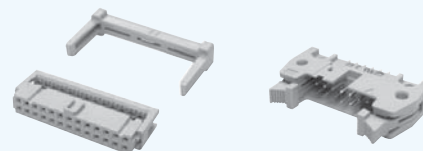

I/O connectors and equipment



We supply the whole range of Harting assortment

DIN 41612 Connectors

High-quality connectors designed for frequent connecting. Operating life is cca 400 mating cycles.



Part No.	Description
09 03 096 0501	Shell housing DIN 41612 for female connectors C, D
09 03 132 6921	Male connector DIN 41612 C 32-pin 3R / A+C PCB 90°
09 03 164 6951	Male connector DIN 41612 C 62+2pin 3R / A+C PCB 90°
09 03 164 6921	Male connector DIN 41612 C 64-pin 3R / A+C PCB 90°
09 03 264 6825	Female connector DIN 41612 C 64-pin 3R / A+C for PCB
09 03 264 6821	Female connector DIN 41612 C 64-pin 3R / A+C wire wrap
09 03 264 6828	Female connector DIN 41612 C 64-pin 3R / A+C flat cable
09 03 296 6821	Female connector DIN 41612 C 96-pin 3R/A+B+C wire wrap

Part No.	Ord.No.
S 09 03 096 0501	2205
S 09 03 132 6921	17655
S 09 03 164 6921	17660
S 09 03 164 6951	64337
S 09 03 264 6825	17659
S 09 03 264 6821	17657
S 09 03 264 6828	2646
S 09 03 296 6821	60318