





LPT2USB - Cable

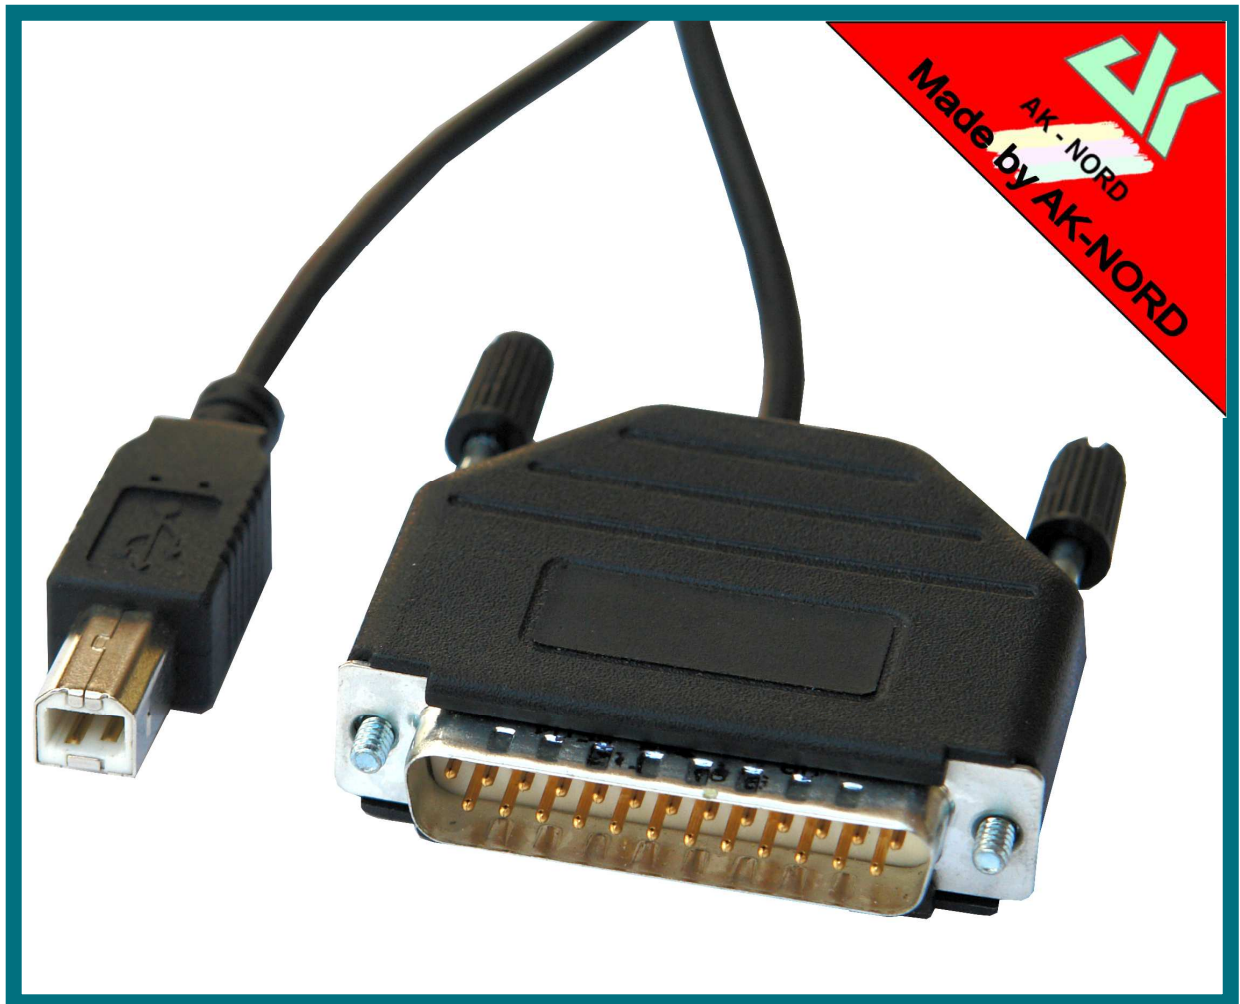

Adapter to connect the LPT(parallel) - Ports from Clients with the USB - Port from Printers and Multifunction-Printers.

Hardware description

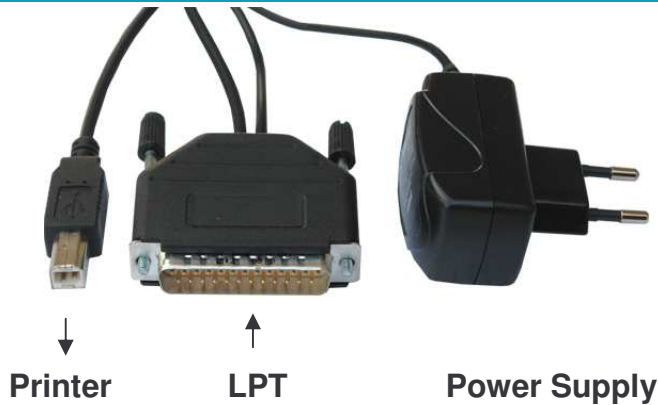

Supported systems

No driver required.

Technical data

- **Power supply:**
Input:
100-240V / 50/60Hz
Output:
5Volt / ca. 100 mA
Cable:
ca. 1,8m
- **USB Interface**
USB1.0
USB1.1
USB2.0 compatible
Class: Printer
Connector: USB - B
Cable: ca.1.8m
Speed:
Low – Speed 1.5 MBit/sec
Full – Speed 12 MBit/sec
Interface protocol
01 Unidirectional
02 Bi-directional
03 1284.4 Bi-directional
- **parallel Interface**
Connector: 25pin SUB-D
IEEE-1284 - A

Supported Protocols

Printing

1. SPP
2. ECP
3. IEEE1284
4. IEEE1284.4

Bidirectional

1. Nibble – Mode
2. Byte – Mode
3. ECP – Reverse
4. BECP - Reverse

Supported Features

- Only printing.
Advice: Scanning, PC-Fax, and Software – Toolboxes are not supported
- Flash – UPDATE
- Status print

